

SikaCeram® 690 Elite

High performance tile grout
to secure perfect finishes

- Dustless® Technology
- Colour consistency
- Superior smoothness
- Significantly reduces efflorescence
- Light foot traffic after 3 hours



BUILDING TRUST



SikaCeram[®]-690 Elite

Introducing SikaCeram[®]-690 Elite grout, a flexible premium performance grout that offers superior smoothness with a fine finish. Formulated with improved colour consistency and stability and efflorescence resistance properties to ensure long lasting performance. Available in a range of contemporary colours to perfectly compliment any natural stone sensitive to discoloration, mosaic, ceramic and porcelain tiling projects.

WHITE 10

SILVER GREY 13

GREY 19

ASH 21

PLATINUM GREY 25

DARK GREY 28

GRAPHITE 34

ANTHRACITE 31

COOL COLOUR PALETTE

SikaCeram[®]-690 Elite

*Grout colours are a guide only and may vary to the actual grout colour.

BUILDING TRUST





SCAN QR CODE
for design and colour
inspiration for the
perfect finish



PERGAMON 40

JASMINE 43

BAHAMA BEIGE 46

JURA BEIGE 52

SANDSTONE 49

MANHATTAN 16

SAND GREY 22

CARAMEL 55

HAVANNA 58

BALI BROWN 61

WARM COLOUR PALETTE

SikaCeram®-690 Elite

*Grout colours are a guide only and
may vary to the actual grout colour.

BUILDING TRUST





TILE TYPE

- Mosaic and porcelain tiles
- Artificial stone tiles
- Fully vitrified tiles
- Glass tiles and glazed ceramic tiles
- Marble and other natural stones

USES

- Interior and exterior walls and floors
- Wet areas and residential pools
- Commercial environments
- Heated floors (water and electric systems)
- Facades, balconies and external areas

CHARACTERISTICS / ADVANTAGES

- Smooth fine finish
- Excellent colour consistency
- Excellent hardness and durability
- Significantly reduces efflorescence
- Stain resistant and easy to clean
- Abrasion resistant
- Water-repellent
- Low shrinkage
- Low dust during mixing
- Suitable for joints 1-10mm
- 18 colours
- 5kg bags



SikaCeram®-690 Elite - SCAN QR CODE
for application instructions, directions for
use and detailed technical specification data



COVERAGE GUIDE

The coverage of the grout will vary depending upon the texture, size and thickness of the tile and the width of the grout joint. Use the table below as a general guide:

Tile Size	Quantity of grout required kg/m ² per joint width				
	1.5mm	3mm	5mm	8mm	10mm
20 x 20 x 4mm	1.11	2.22	3.7		
200 x 200 x 6mm	0.17	0.33	0.56	0.89	1.11
300 x 300 x 8mm	0.15	0.3	0.49	0.79	1.0
600 x 300 x 9mm	0.12	0.25	0.42	0.67	0.83
600 x 600 x 9mm	0.10	0.20	0.3	0.45	0.56

Technical Data	SikaCeram® 690 Elite
Tensile strength in flexure @ 2.5 Mpa Compressive strength @ 15 Mpa Abrasion resistance Water absorption after 30 min @ ≤2g Water absorption after 240 min @ ≤5g	CG2WA according to AS ISO 13007
Appearance	Fine powder
Abrasion resistance	≤1000mm ³
Pot life at 20°C	30 minutes
Shelf life when stored unopened in elevated, cool, dry location	2 years from date of production
Return to service	Pedestrian traffic waiting time ~ 3 hours Full traffic waiting time ~ 7 days


Values determined in laboratory conditions: +23 °C ± 2 °C, R.H. 50 % ± 5 %.

Note: Higher temperatures will reduce the waiting time, lower temperatures increase waiting time.

SikaTile®

A SIKA SECURE TILING SYSTEM

SikaTile® is an innovative tile and stone installation product range that meets the unique challenges and performance requirements of installers. From an efflorescence inhibiting primer with Crystalline Technology to a fibre reinforced membrane for superior strength to a safer, environmentally friendly, Dustless® dry mix adhesive with 0% Crystalline Silica, your tiling system is secure with SikaTile®.

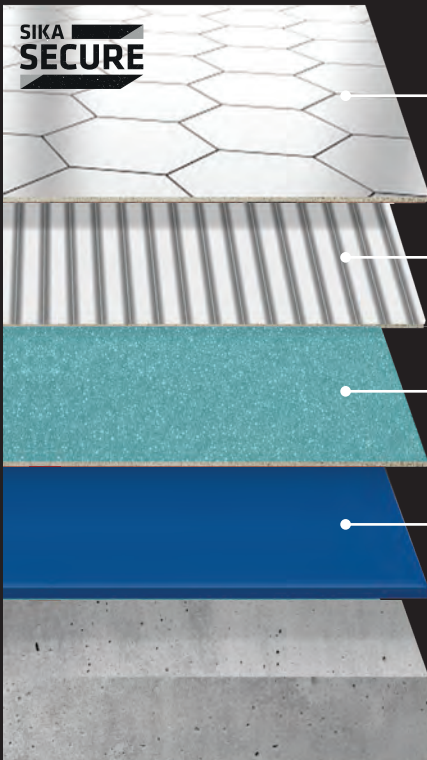

TILE GROUT

SikaCeram®-690 Elite

TILE ADHESIVE

SikaTile®-405 Lite

SikaTile®-410 Secure Set

SikaTile®-510 Mega Lite

WATERPROOFING

SikaTile®-110 Secure Proof

PRIMER

SikaTile®-010 Secure Prime

SikaTile®-015 NPP



SCAN QR CODE

to learn more about SikaTile®



SikaAustralia sika_australia Sika Australia

sika.com.au

BUILDING TRUST

