

## PRODUCT DATA SHEET

# SikaRoof® VersiDrain® BG®

### WATER ATTENUATING PLANTING TRAY MODULES FOR EXTENSIVE GREEN ROOFS

#### DESCRIPTION

SikaRoof® VersiDrain® BG® is a lightweight planting tray designed for extensive blue green roofs and functions as a water retaining tray, water attenuation tray, and a drainage mat. Modules are manufactured from recycled polypropylene (PP), and consist of three layers: a planting layer, an irrigation reservoir area, and a stormwater attenuation layer.

SikaRoof® VersiDrain® BG® interlock with adjacent modules for easy installation and has a smooth base for safe placement directly over the waterproofing membrane. Its internal irrigation reservoir promotes plant sustainability and its stormwater attenuation layer collects and slowly releases at-source stormwater to mitigate overburdening of drainage infrastructures amidst our current crisis.

#### USES

Water retention, attenuation and drainage layer for extensive blue green roofs, landscape decks and lightweight green installations requiring water storage in combination with a suitable geotextile as a filtration layer to prevent planting media from clogging the reservoir and drainage layer.

#### PRODUCT INFORMATION

##### Packaging


- SikaRoof® VersiDrain® BG®  
Refer to pricelist

#### FEATURES

- Integrated water reservoir
- Integrated water attenuation
- Trays interlock adjacently for uniform coverage
- Smooth base protects underlying waterproofing membrane
- Resistant to biological attack by moulds and algae
- Chemically resistant to acids, alkalis, oils and soil chemicals
- Operates within a wide service temperature range

#### CERTIFICATES AND TEST REPORTS

Singapore Green Building Product (Leader) Cert. No. SGBP 3260

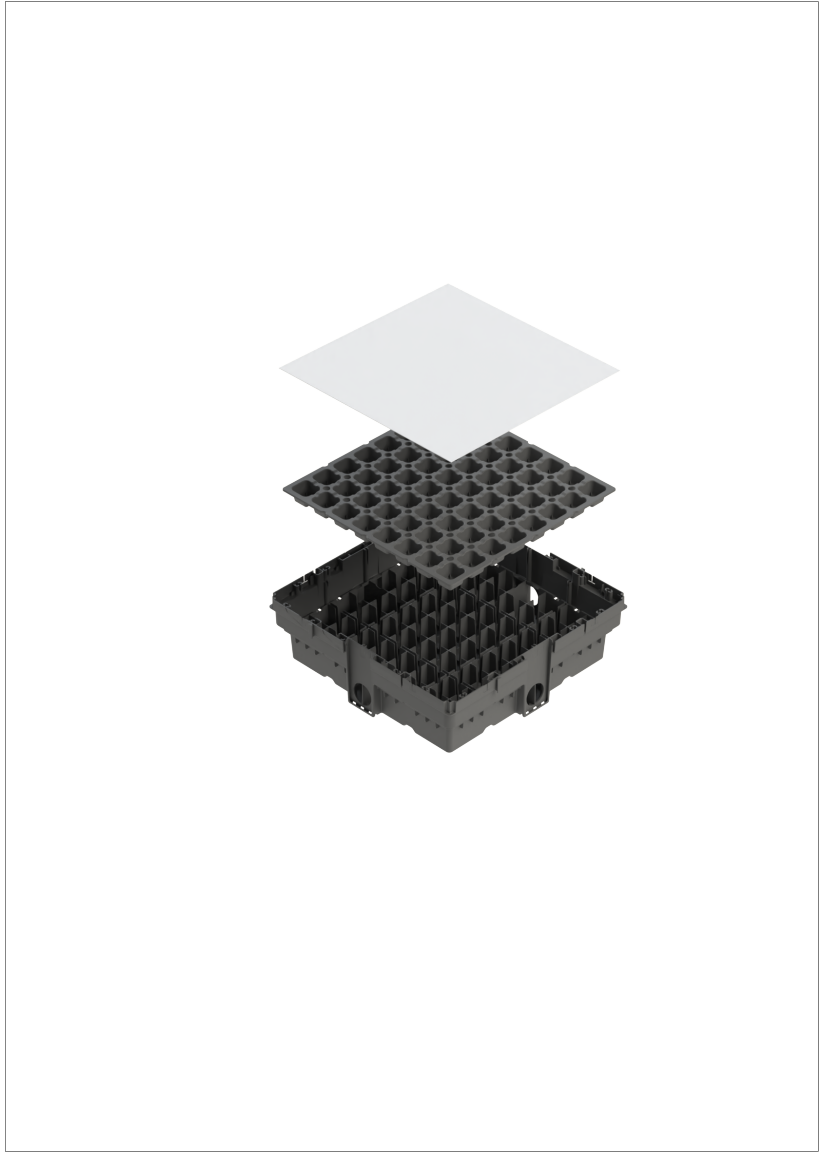

<b>Shelf life</b>	No expiration date if the product is stored in accordance with the storage conditions as stated in this Product Data Sheet	
<b>Storage conditions</b>	Bundles must be stored in their original packing, laid in a horizontal position, and under cool and dry conditions. The product must be protected from direct sunlight, rain, snow and ice, and any other elements	
<b>Dimensions</b>	500 x 500 x 150 mm	
<b>Weight</b>	12 kg/m <sup>2</sup>	

**TECHNICAL INFORMATION**

<b>Service temperature</b>	- 30 °C to 80 °C	
<b>Water retention</b>	<b>Water Reservoir Capacity</b>	<b>Water Retention Capacity</b>
	10 L/m <sup>2</sup>	40 L/m <sup>2</sup>

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## IMPORTANT CONSIDERATIONS

- When used in combination with Sarnafil® or Sikaplan® PVC membranes, a separation/protection layer is recommended.

For more information, please contact the Sika Sales Personnel.

## ECOLOGY, HEALTH AND SAFETY

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in the product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0,1 % (w/w).

## APPLICATION INSTRUCTIONS

### SUBSTRATE PREPARATION

Clean and sound surface shall have at least a wood float finish. All holes, joints, and cracks and honeycombs in concrete or masonry surfaces shall be filled with an approved grout and allowed to cure. High spots in concrete or masonry surfaces shall be cut off or ground down to prevent damage/puncture to the water retention planting tray module.

### APPLICATION

SikaRoof® VersiDrain® BG® shall be loosely laid and interlocked with adjacent modules connected by proprietary clips to form a continuous water retention and drainage layer without any mechanical fixing either on top of the waterproofing membrane or on top of the concrete surface. The installed water retention and drainage modules would then be covered with an approved or Sika® geotextile filter fabric before pouring the planting media into the modules.

#### Sika Australia Pty Limited

ABN 12 001 342 329

aus.sika.com

Tel: 1300 22 33 48

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SikaRoofVersiDrainBG-en-AU-(06-2026)-2-1.pdf

#### Product Data Sheet

SikaRoof® VersiDrain® BG®

June 2026, Version 02.01

020945051450243564