

PRODUCT DATA SHEET

SikaRoof® VersiWall GM

PLANTING MODULE FOR WALL MOUNTED LANDSCAPE GREENING

DESCRIPTION

SikaRoof® VersiWall GM is a planting module that may be mounted onto walls to create green wall facades. Planting modules are manufactured from recycled polypropylene (PP), and it encases a large soil volume for lush planting.

SikaRoof® VersiWall GM is used in conjunction with SikaRoof® VersiWall GM Pilaster with its in-built hooks to create a wind uplift resistance and robust green wall system.

USES

Planting modules are used to create green walls on either internal or external wall facades.

PRODUCT INFORMATION

Packaging

- SikaRoof® VersiWall GM
 - SikaRoof® VersiWall GM Quarter
- Refer to pricelist

Appearance and colour


Black perforated box module

FEATURES

- Wind uplift resistant to 110 km/h
- Robust module
- Easy mounting and dismantling for maintenance
- Resistant to biological attack by moulds and algae
- Chemically resistant to acids, alkalis, oils and soil chemicals
- Operates within a wide service temperature range

CERTIFICATES AND TEST REPORTS

Singapore Green Building Product (Leader) Cert. No. SGBP 3256

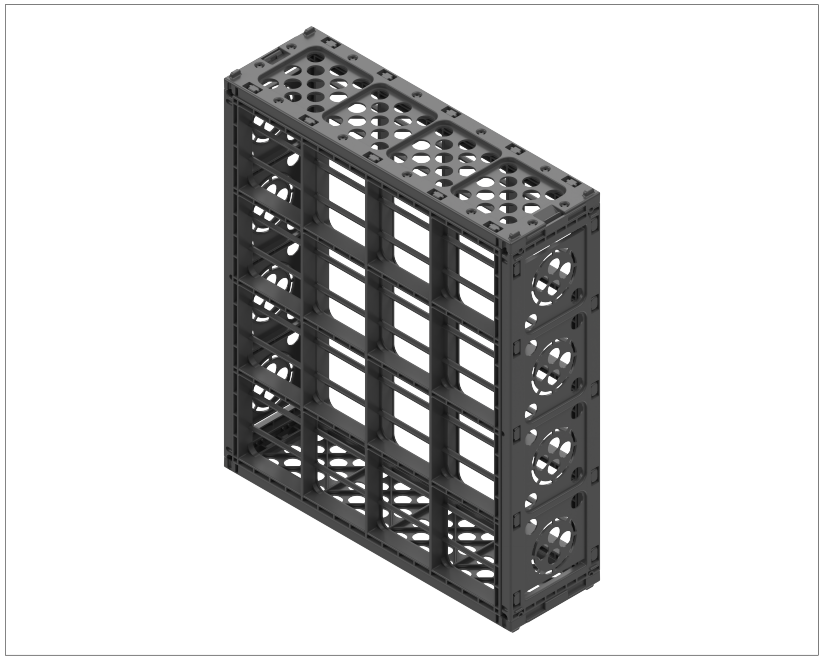

Shelf life	No expiration date if the product is stored in accordance to the storage conditions as stated in this Product Data Sheet.	
Storage conditions	Products must be stored in their original packing, in their original box, and under cool and dry conditions. The product must be protected from direct sunlight, rain, snow and ice, and any other elements.	
Dimensions	SikaRoof® VersiWall GM	
	Whole	Quarter
	480 x 565 x 150 mm	155 x 525 x 150 mm

TECHNICAL INFORMATION

Service temperature	- 30 °C to 80 °C
Volume	Planting Media Volume 26 L

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

IMPORTANT CONSIDERATIONS

For more information, please contact Sika Sales Personnel.

ECOLOGY, HEALTH AND SAFETY

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in the product data sheet. Based on our current knowledge, this

product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0,1 % (w/w).

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika re-

serves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Australia Pty Limited

ABN 12 001 342 329

aus.sika.com

Tel: 1300 22 33 48

Product Data Sheet

SikaRoof® VersiWall GM

May 2026, Version 01.01

020945051990244853

