

PRODUCT DATA SHEET

SikaRoof® VersiJack® K Spacer Tab

SPACER TAB FOR HEIGHT-ADJUSTABLE PEDESTAL SYSTEM FOR RAISED PAVERS FLOORING

DESCRIPTION

SikaRoof® VersiJack® K Spacer Tab is an accessory used on top of adjustable pedestals to create precise and uniform gaps for the alignment of pavers in raised flooring systems. Spacer tabs are manufactured from recycled polypropylene (PP) and it has four breakable tabs to support four paver corners that rest on top of the adjustable pedestal.

SikaRoof® VersiJack® K Spacer Tab is used in conjunction with SikaRoof® VersiJack® K and may be manufactured with tabs of various thicknesses to create varying drainage gaps sizes, to support concrete pavers, stone pavers, and porcelain tiles that have a minimum thickness of 20 mm.

USES

Spacer tabs are used with adjustable pedestals for raised pavers flooring on podiums, balconies, roof terraces and areas with hardscape finishes.

FEATURES


- Consistent paver gaps
- Promotes surface drainage
- Eliminates efflorescence
- Recyclable components
- Resistant to biological attack by moulds and algae
- Chemically resistant to acids, alkalis, oils and soil chemicals
- Operates within a wide service temperature range

CERTIFICATES AND TEST REPORTS

Singapore Green Building Product (Leader) Cert. No. SGBP 3254

PRODUCT INFORMATION

Packaging	SikaRoof® VersiJack® K Spacer Tab		
	3x12	4x12	5x12
	6x12	8x12	10x12
Refer to pricelist			
Appearance and colour	Black circular disc spacer tab		

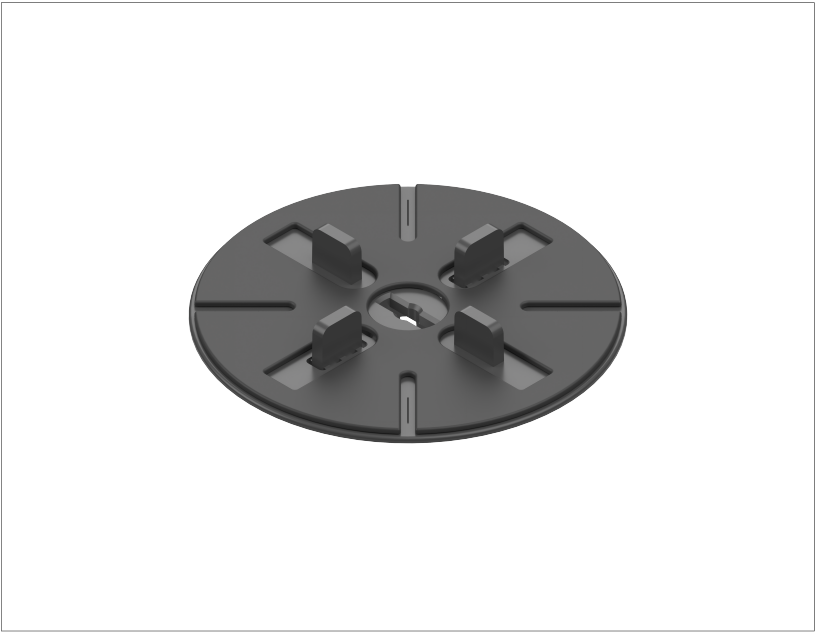

Shelf life	No expiration date if the product is stored in accordance to the storage conditions as stated in this Product Data Sheet.																	
Storage conditions	Products must be stored in their original packing, in their original box, and under cool and dry conditions. The product must be protected from direct sunlight, rain, snow and ice, and any other elements.																	
Thickness	<table><tr><th colspan="3">Spacer Tab Thickness</th></tr><tr><td>3x12</td><td>4x12</td><td>5x12</td></tr><tr><td>3 mm</td><td>4 mm</td><td>5 mm</td></tr><tr><td>6x12</td><td>8x12</td><td>10x12</td></tr><tr><td>6 mm</td><td>8 mm</td><td>10 mm</td></tr></table>			Spacer Tab Thickness			3x12	4x12	5x12	3 mm	4 mm	5 mm	6x12	8x12	10x12	6 mm	8 mm	10 mm
Spacer Tab Thickness																		
3x12	4x12	5x12																
3 mm	4 mm	5 mm																
6x12	8x12	10x12																
6 mm	8 mm	10 mm																
Diameter	118 mm																	
Height	<table><tr><th>Spacer Tab Height</th></tr><tr><td>12 mm</td></tr></table>			Spacer Tab Height	12 mm													
Spacer Tab Height																		
12 mm																		

TECHNICAL INFORMATION

Service temperature	- 30 °C to 80 °C
---------------------	------------------

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

IMPORTANT CONSIDERATIONS

- SikaRoof® VersiJack® K Spacer Tab is not resistant to permanent weathering and UV exposure. For more information, please contact Sika Sales Personnel.

ECOLOGY, HEALTH AND SAFETY

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in the product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0,1 % (w/w).

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Australia Pty Limited

ABN 12 001 342 329

aus.sika.com

Tel: 1300 22 33 48

Product Data Sheet

SikaRoof® VersiJack® K Spacer Tab

August 2026, Version 01.01

020945051990243945

SikaRoofVersiJackKSpacerTab-en-AU-(08-2026)-1-1.pdf

